

Overview

HPE Alletra 4110

Are you looking for server-based data infrastructure with exceptional performance to accelerate your data-driven initiatives?

The HPE Alletra 4110 data storage server is specifically designed to run your most performance demanding data storage-centric workloads to power your data-driven initiatives to success. From data stores for machine learning (ML) and analytics to distributed and NoSQL databases, performance sensitive Software-Defined Storage, and data heavy hyperconverged infrastructure, it delivers the capabilities you need at ideal economics with trusted security and a cloud operating experience. This includes the option to consume as-a-Service via HPE GreenLake enabling you to shift from owning and maintaining to simply utilizing it. HPE Alletra 4000 data storage servers provide the data infrastructure for any successful data driven organization.



HPE Alletra 4110 20EDSFF Configure-to-order System



HPE Alletra 4110 20SFF Configure-to-order System

Overview




HPE Alletra 4110 Configure-to-order System Front View (20EDSFF SKU shown)

- | | |
|---|-------------------|
| 1. Serial number/iLO information pull tab | 5. NIC status LED |
| 2. iLO service port | 6. UID button/LED |
| 3. Power On/Standby button and system power LED | 7. USB 3.0 port |
| 4. Health LED | |



Overview

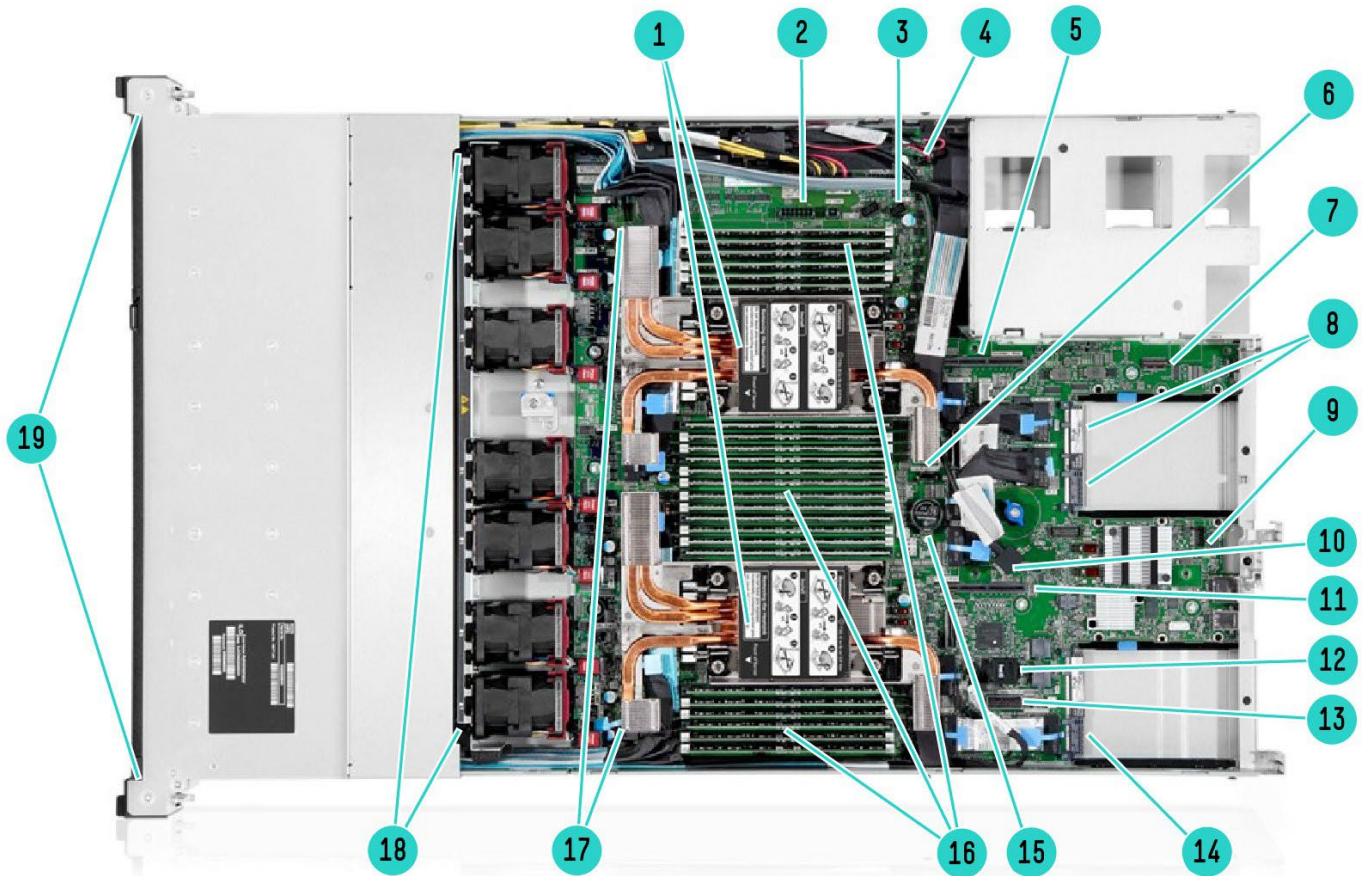


HPE Alletra 4110 Configure-to-order System Internal View (20EDSFF SKU shown)

- | | |
|---|--|
| 1. Up to 2 processors (2 processors installed with performance heat sink shown) | 11. Primary riser connector |
| 2. Energy pack connector | 12. Front I/O connector |
| 3. Drive cage 2 power connector | 13. PCIe Gen3 connector |
| 4. Drive cage 1 power connector | 14. OCP1 connector |
| 5. Secondary riser connector | 15. System battery |
| 6. Processor Smart Cooling Module connector | 16. DDR5 DIMM slots (Fully populated 24 DIMMs shown) |
| 7. System maintenance switch | 17. MCIO Connectors |
| 8. OCP2 A & B connector | 18. System fans |
| 9. Serial port connector | 19. Drive Cage 1 |
| 10. Internal USB connector | |



Overview

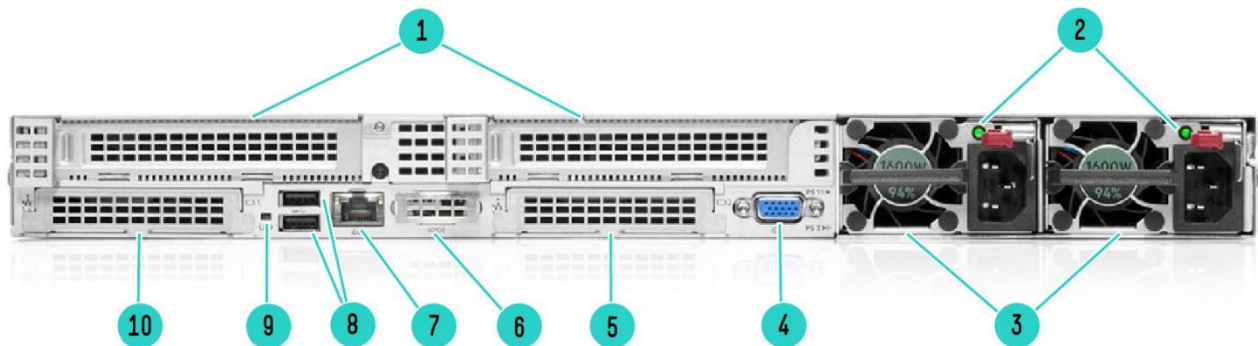

HPE Alletra 4110 Configure-to-order System Rear View – Standard for all Alletra 4110

- | | |
|--|---------------------------|
| 1. PCIe slot 1 & 2 | 6. Serial port (optional) |
| 2. Power supply LED (bay 1 & 2) | 7. iLO management port |
| 3. Hot-plug power supply bay 1 (standard) & 2 (optional) | 8. USB 3.0 ports |
| 4. Video port | 9. UID LED |
| 5. OCP slot (OCP2) | 10. OCP slot (OCP1) |

What's New

- 20 direct connect Enterprise and Data Center Standard Form Factor (EDSFF) All-NVMe design with up to 315 GB/s of PCIe Gen5 bandwidth (or 20 SFF) in a dense, 1U standard rack depth form factor.
- Dual 4th generation Intel® Xeon® Scalable processors delivering more performance plus DDR5 memory with up to 50%¹ more bandwidth for demanding data processing workloads.
- Zero trust security from silicon to software and factory to cloud with HPE Integrated Lights Out 6, DMTF Security Protection Data Model support, and FIPS140-2 Self-Encrypting Drives.
- HPE Greenlake for Compute Ops Management offers cloud-native control and redhats for simplified and automated lifecycle management including dramatically easier firmware management.

Notes:¹ 4800 MT/s versus 3200 MT/s for the 3rd generation Intel® Xeon® Scalable processors.

Platform Information

Form Factor

- 1U rack

Chassis Types

- 20 EDSFF E3.S 1T PCIe Gen5 x4 connected
- 20 SFF NVMe PCIe Gen4 x4 connected

System Fans

- 7 hot-pluggable system fan modules shipped as standard

Notes: Choice of High Performance Fan Kit or Smart Cooling Fan Kit based on the processor selection



Standard Features

Processors – always 2 of the following, depending on model.

Notes:

- The 2nd digit of the processor model number “x4xx” is used to denote the processor generation (i.e. 4 = 4th generation)
- This table covers the public Intel offering only.
- For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Platinum Processors

Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size
Platinum 9468 Processor	2.1 GHz	48	105 MB	350 W	4 @ 16 GT/s	4800 MT/s	512GB
Platinum 9462 Processor	2.7 GHz	32	75 MB	350 W	3 @ 16 GT/s	4800 MT/s	128GB
Platinum 9460 Processor	2.2 GHz	40	97.5 MB	350 W	3 @ 16 GT/s	4800 MT/s	128GB
Platinum 8468 Processor	2.1 GHz	48	105 MB	350 W	4 @ 16 GT/s	4800 MT/s	512GB
Platinum 8462+ Processor	2.8 GHz	32	60 MB	300 W	3 @ 16 GT/s	4800 MT/s	128GB
Platinum 8460Y+ Processor	2.0 GHz	40	105 MB	300 W	4 @ 16 GT/s	4800 MT/s	128GB
Platinum 8452Y Processor	2.0 GHz	36	67.5 MB	300 W	4 @ 16 GT/s	4800 MT/s	128GB

Notes:

- 2 socket capable, 2S -4 or 3 UPI @ 16 GT/s.
- 4th Generation: 8-Channel DDR5 @ 4800 MT/s (2DPC @ 4400 MT/s)
- 80 lanes PCIe 5.0, advanced RAS.
- Y Supports Intel Speed Select Technology – Performance Profile 2.0 (Intel SST-PP).

Gold Processors

Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size
Gold 6454S Processor	2.2 GHz	32	60 MB	270 W	4 @ 16 GT/s	4800 MT/s	128GB
Gold 6448Y Processor	2.1 GHz	32	60 MB	225 W	3 @ 16 GT/s	4800 MT/s	128Gb
Gold 6444Y Processor	3.6 GHz	16	45 MB	270 W	3 @ 16 GT/s	4800 MT/s	128Gb
Gold 6442Y Processor	2.6 GHz	24	60 MB	225 W	3 @ 16 GT/s	4800 MT/s	128Gb
Gold 6438Y+ Processor	2.0 GHz	32	60 MB	205 W	3 @ 16 GT/s	4800 MT/s	128Gb
Gold 6434 Processor	3.7 GHz	8	22.5 MB	195 W	3 @ 16 GT/s	4800 MT/s	128Gb
Gold 6430 Processor	2.1 GHz	32	60 MB	270 W	3 @ 16 GT/s	4400 MT/s	128Gb
Gold 6426Y Processor	2.5 GHz	16	37.5 MB	185 W	3 @ 16 GT/s	4800 MT/s	128Gb
Gold 5420+ Processor	2.0 GHz	28	52.5 MB	205 W	3 @ 16 GT/s	4400 MT/s	128Gb
Gold 5418Y Processor	2.0 GHz	24	45 MB	185 W	3 @ 16 GT/s	4400 MT/s	128Gb
Gold 5418N Processor	1.8 GHz	24	45 MB	165 W	3 @ 16 GT/s	4000 MT/s	128GB
Gold 5416S Processor	2.0 GHz	16	30 MB	150 W	3 @ 16 GT/s	4400 MT/s	128Gb
Gold 5415+ Processor	2.9 GHz	8	22.5 MB	150 W	3 @ 16 GT/s	4400 MT/s	128Gb

Notes:

- 2 socket capable, 2S - 4 or 3 UPI @ 16 GT/s, except U SKUs
- 4th Generation: 8-Channel DDR5 @ 4400-4800 MT/s (2DPC @ 4400 MT/s).
- 80 lanes PCIe 5.0, advanced RAS.
- Y Supports Intel Speed Select Technology – Performance Profile 2.0 (Intel SST-PP).
- S SKUs are storage & hyperconverged infrastructure (HCI) optimized SKUs



Standard Features

Silver Processors							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size
Silver 4416+ Processor	2.0 GHz	20	37.5 MB	165 W	2 @ 16 GT/s	4000 MT/s	64GB
Silver 4410Y Processor	2.0 GHz	12	30 MB	150 W	2 @ 16 GT/s	4000 MT/s	64Gb

Notes:

- 2 socket capable, 2S - 2 UPI @ 16 GT/s, except U SKUs
- 4th Generation: 8-Channel DDR5 @ 4000 MT/s
- 80 lanes PCIe 5.0, advanced RAS.
- Y Supports Intel Speed Select Technology – Performance Profile 2.0 (Intel SST-PP).

Chipset

Intel C741 Chipset

Notes: For more information regarding Intel® chipsets, please see the following URL:

<https://www.intel.com/content/www/us/en/products/chipsets/server-chipsets.html>

System Management Chipset

HPE iLO 6 ASIC

Notes: Read and learn more in the [iLO QuickSpecs](#).

Memory

Type	HPE DDR5 Smart Memory Registered (RDIMM)
DIMM Slots Available	24 12 DIMM slots per processor, 8 channels per processor, 2-2-1-1 deployment
Maximum capacity (RDIMM)	6 TB 24 x 256 GB RDIMM @ 4800 MT/s

Notes:

- The maximum memory speed is limited by the processor selection.
- The maximum capacity per system is limited by the overall configuration selection due to thermal capacity.

Memory Protection

Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

Online Spare

Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

Notes: For more information see our [Memory RAS feature technical whitepaper](#).



Standard Features

Expansion Slots

Primary Riser					
Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
1	PCIe 5.0	x16	x16	CPU 1	Full-height, half-length

Secondary Riser					
Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
2	PCIe 5.0	x16	x16	CPU 2	Full-height, half-length

Internal Storage Devices

- **Hard Drives**
None ship standard

Storage Controllers

NVMe Boot Devices

- **Optional HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device**

Notes:

- NS204i-u does not occupy a PCIe slot and internal only for Alletra 4110.
- 2pcs of 480GB M.2 NVMe SSD are included in the NS204i-u Hot Plug Boot Device
- RAID 1 supported on the NS204i-u Hot Plug Boot Device.

Maximum Storage

Storage	Capacity	Configuration
Hot Plug SFF NVMe PCIe SSD	307.2 TB	20 x 15.36 TB
Hot Plug EDSFF NVMe PCIe SSD	307.2 TB	20 x 15.36 TB
NVMe M.2 SSD	3.84 TB	2 x 1.92 TB

Graphics

- Integrated video standard
 - Video modes up to 1920 x 1200 @ 60 Hz (32 bpp)
 - 16 MB Video Memory
- HPE iLO 6 on system management memory
 - 32 MB Flash
 - 4 Gbit DDR3 with ECC protection

Power Supply

- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes: Available in 94% efficiency.
- HPE 1000W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit
Notes: Available in 96% efficiency.



Standard Features

- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes:
 - Available in 94% efficiency.
 - 1600W Power supplies only support high line voltage (200 VAC to 240 VAC).
- HPE 1800-2200W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit
Notes:
 - Available in 96% efficiency.
 - 1800-2200W Power supplies only support high line voltage (200 VAC to 240 VAC).
 - HPE 1600W ~48VDC Power Supply Kit

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Plus Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

Interfaces

Serial	1 port – Optional, rear
VGA Port	1 port – Standard, rear
Network Ports	None. Choice of OCP or stand up card, supporting a wide range of NIC adapters
HPE iLO Remote Management Network Port	1 GbE Dedicated
Front iLO Service Port	1 standard
USB 3.0	4 standard on all models: 1 front, 2 rear, 1 internal

Operating Systems and Virtualization Software

- [Windows Server 2019](#)
- [Windows Server 2022](#)
- [Red Hat Enterprise Linux \(RHEL\) 8.6](#)
- [Red Hat Enterprise Linux \(RHEL\) 9.0](#)
- [SUSE Linux Enterprise Server \(SLES\) 15 SP4](#)
- [VMware 7.0 U3](#)
- [VMware 8.0](#)
- [Canonical Ubuntu 22.04](#)

Notes:

- Pending Canonical Ubuntu 20.04 certification, available post launch
- For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server visit <http://www.hpe.com/info/ossupport>



Standard Features

Industry Standard Compliance

- ACPI 6.4 Compliant
- PCIe 5.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- USB 3.2 Gen1 Compliant
- SMBIOS 3.4
- Redfish API
- IPMI 2.0
- Secure Digital 4.0
- TPM 2.0 support
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line (SMASH CLP)
- One Button Secure Erase Enhancements
- UEFI (Unified Extensible Firmware Interface Forum) 2.7

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO.

Learn more at <http://www.hpe.com/info/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

Learn more at <http://www.hpe.com/servers/uefi>.

Intelligent Provisioning

Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning.

Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.



Standard Features

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP).

Learn more at <https://www.hpe.com/us/en/servers/smart-update.html>.

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9, Gen10 and Gen10 Plus HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell.

Learn more at <http://www.hpe.com/servers/powershell>.

HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <http://www.hpe.com/info/oneview>.

HPE GreenLake for Compute Ops Management

HPE is intelligently transforming compute management with a completely new As a Service experience that delivers greater security, simplicity, and efficiency. Discover a completely modernized compute management experience delivered through HPE GreenLake that securely streamlines operations from edge-to-cloud, and automates key lifecycle tasks (onboard, update, manage and monitor HPE servers), bringing the agility and greater efficiencies to wherever compute devices reside via a unified single browser-based interface.

Compute Ops Management is built on a unique cloud-native architecture that abstracts, manages and controls HPE servers regardless of physical location. The management application resides in the HPE GreenLake cloud platform (access via <https://console.greenlake.hpe.com>) and leverages the HPE GreenLake architecture, security, and unified operations.

Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-2 validation
- Common Criteria certification
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)



Standard Features

- iLO Security Modes
- Granular control over iLO interfaces
- Smart card (PIV/CAC) and Kerberos based 2-factor Authentication
- Tamper-free updates – components digitally signed and verified
- Secure Recovery – recover critical firmware to known good state on detection of compromised FW
- Ability to rollback firmware
- Secure erase of NAND
- TPM (Trusted Platform Module)
- Bezel Locking Kit
- Chassis Intrusion detection

HPE Trusted Platform Module

HPE Trusted Platform Module 2.0 is included on Pre-Configured models and can be enabled and disabled using the BIOS.

Notes:The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys.

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Notes: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<https://www.hpe.com/us/en/search-results.html?page=1&q=servers%20warranty&autocomplete=0>.



Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9, Gen10 and Gen10 Plus servers. To learn more visit <http://www.hpe.com/info/oneview>.

HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

Accelerator and GPGPU Information

Hewlett Packard Enterprise supports various accelerators on select HPE ProLiant servers to support different workloads. The accelerators enable seamless integration of GPU computing with HPE ProLiant servers for high-performance computing, large data center graphics, deep learning and virtual desktop deployments. These accelerators deliver all of the standard benefits of GPU computing while enabling maximum reliability and tight integration with system monitoring and management tools such as HPE Insight Cluster Management Utility.

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance

<https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>



Service and Support

HPE Pointnext - Service and Support

Get the most from your HPE Products. Get the expertise you need at every step of your IT journey with **HPE Pointnext Services**. We help you lower your risks and overall costs using automation and methodologies that have been tested and refined by HPE experts through thousands of deployments globally. HPE Pointnext **Advisory Services** focus on your business outcomes and goals, partnering with you to design your transformation and build a roadmap tuned to your unique challenges. Our **Professional** and **Operational Services** can be leveraged to speed up time-to-production, boost performance and accelerate your business. HPE Pointnext specializes in flawless and on-time implementation, on-budget execution, and creative configurations that get the most out of software and hardware alike.

Consume IT on your terms

HPE GreenLake brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

Managed services to run your IT operations

HPE GreenLake Management Services provides services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

Recommended Services

HPE Pointnext Tech Care.

HPE Pointnext Tech Care is the new operational service experience for HPE products. Tech Care goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Pointnext Tech Care has been reimagined from the ground up to support a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Pointnext Tech Care is available in three response levels. Basic, which provides 9x5 business hour availability and a 2 hour response time. Essential which provides a 15 minute response time 24x7 for most enterprise level customers, and Critical which includes a 6 hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

HPE Pointnext Complete Care

HPE Pointnext Complete Care is a modular, edge-to-cloud IT environment service that provides a holistic approach to optimizing your entire IT environment and achieving agreed upon IT outcomes and business goals through a personalized and customer-centric experience. All delivered by an assigned team of HPE Pointnext Services experts. HPE Pointnext Complete Care provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/completecure>



Service and Support

Other related Services

HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://h20195.www2.hpe.com/v2/Getdocument.aspx?docname=5981-9356enw>

HPE Installation and Startup Service

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

DC for Hyperscale

Complete Care for Hyperscale is available for Service Providers and HPC customers who use a scale out approach to computing with a high volume homogenous infrastructure and resilient architecture can take advantage of this environment support tailored to their operating model.

HPE Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

HPE Service Credits

HPE Service Credits offers flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <http://www.hpe.com/ww/learn>

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>.

The HPE Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

Notes: *HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>.



Service and Support

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [here](#).

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.



Configuration Information

This section lists some of the steps required to configure a Factory Integrated Model.

To ensure valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator.

Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information

Step 1: Base Configuration (choose one of the following configurable models)

Network Choice (NC) Models

Network Choice models do not include embedded LOM. To enable networking capability please select a validated alternative NIC -OCP or PCIe- from the Core Options section.

CTO Server	HPE Alletra 4110 20SFF Configure-to-order System	HPE Alletra 4110 20EDSFF Configure-to-order System
SKU Number	P51167-B21	P51168-B21
TAA SKU*	P51167-B21#GTA	P51168-B21#GTA
Processor	Not included as standard	
DIMM Slots	24-DIMM slots	
PCIe	PCIe 5.0: 2 slots (2 x16 FHHL)	
Drive Cage - included	20 SFF NVMe PCIe x4 connected Basic carrier (BC) drive support	20 EDSFF E3.S 1T NVMe PCIe x4 connected
Network Controller	Choice of OCP or stand up cards Notes: No embedded networking.	
Fans**	7 Standard Fans Choice of High Performance Fans or Smart Cooling Fan Kit based on the processor selection	
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download), HPE GreenLake for Compute Ops Management (subscription included)	
USB	Front: 1 USB 3.0 + iLO service port Rear: 2 USB 3.0 Internal: 1 USB 3.0	
Form Factor	1U Rack	
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.	

Notes:

- * HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country.
- ** Fans should be selected separately depending on the configuration.



Configuration Information

Step 2: Choose Required Options

Please select two matching processors.

Notes:

- Mixing of 2 different processor models is not supported.
- Processors with TDP equal to or greater than 270W require Smart Cooling Module Kit (P51171-B21).
- Processors with TDP equal to or greater than 270W require Smart Cooling Fan Kit (P51675-B21).
- Processors with TDP lower than 270W require High Performance Heat Sink Kit (P51169-B21).
- Processors with TDP lower than 270W require High Performance Fan Kit (P51673-B21).

Step 2a: Choose Processor Options

Processor Option Kits

4th Generation Intel Xeon-Platinum

Notes:

- All SKUs below ship with processor only. Adequate fans and heatsinks (Smart Cooling Module or high performance) must be selected.
- 4800 MT/S maximum memory speed unless otherwise noted.

Description

	SKU
Intel Xeon-Platinum 9468 2.1GHz 48-core 350W Processor Kit for HPE Alletra 41X0	P50810-B21
– Requires Smart Cooling Module Kit (P51171-B21), Smart Cooling Fan Kit (P51675-B21).	
– 512GB SGX Enclave.	
Intel Xeon-Platinum 9462 2.7GHz 32-core 350W Processor Kit for HPE Alletra 41X0	P50814-B21
– Requires Smart Cooling Module Kit (P51171-B21), Smart Cooling Fan Kit (P51675-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Platinum 9460 2.2GHz 40-core 350W Processor Kit for HPE Alletra 41X0	P50815-B21
– Requires Smart Cooling Module Kit (P51171-B21), Smart Cooling Fan Kit (P51675-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Platinum 8468 2.1GHz 48-core 350W Processor Kit for HPE Alletra 41X0	P51959-B21
Notes:	
– Requires Smart Cooling Module Kit (P51171-B21), Smart Cooling Fan Kit (P51675-B21).	
– 512GB SGX Enclave.	
Intel Xeon-Platinum 8462Y+ 2.8GHz 32-core 300W Processor Kit for HPE Alletra 41X0	P50799-B21
Notes:	
– Requires Smart Cooling Module Kit (P51171-B21), Smart Cooling Fan Kit (P51675-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Platinum 8460Y+ 2.0GHz 40-core 300W Processor Kit for HPE Alletra 41X0	P50800-B21
Notes:	
– Requires Smart Cooling Module Kit (P51171-B21), Smart Cooling Fan Kit (P51675-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Platinum 8452Y 2.0GHz 36-core 300W Processor Kit for HPE Alletra 41X0	P50807-B21
Notes:	
– Requires Smart Cooling Module Kit (P51171-B21), Smart Cooling Fan Kit (P51675-B21).	
– 128GB SGX Enclave.	



Configuration Information

4th Generation Intel Xeon-Gold

Notes:

- All SKUs below ship with processor only. Adequate fans and heatsinks (Smart Cooling Module or high performance) must be selected.
- 4400 - 4800 MT/s maximum memory speed unless otherwise noted.

Description

	SKU
Intel Xeon-Gold 6454S 2.2GHz 32-core 270W Processor Kit for HPE Alletra 41X0	P50809-B21
Notes:	
– Requires Smart Cooling Module Kit (P51171-B21), Smart Cooling Fan Kit (P51675-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Gold 6448Y 2.1GHz 32-core 225W Processor Kit for HPE Alletra 41X0	P50796-B21
Notes:	
– Requires High Performance Heat Sink Kit (P51169-B21), High Performance Fan Kit (P51673-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Gold 6444Y 3.6GHz 16-core 270W Processor Kit for HPE Alletra 41X0	P50798-B21
Notes:	
– Requires Smart Cooling Module Kit (P51171-B21), Smart Cooling Fan Kit (P51675-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Gold 6442Y 2.6GHz 24-core 225W Processor Kit for HPE Alletra 41X0	P50795-B21
Notes:	
– Requires High Performance Heat Sink Kit (P51169-B21), High Performance Fan Kit (P51673-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Gold 6438Y+ 2.0GHz 32-core 205W Processor Kit for HPE Alletra 41X0	P50806-B21
Notes:	
– Requires High Performance Heat Sink Kit (P51169-B21), High Performance Fan Kit (P51673-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Gold 6434 3.9GHz 8-core 205W Processor Kit for HPE Alletra 41X0	P50797-B21
Notes:	
– Requires High Performance Heat Sink Kit (P51169-B21), High Performance Fan Kit (P51673-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Gold 6430 1.9GHz 32-core 270W Processor Kit for HPE Alletra 41X0	P50805-B21
Notes:	
– Requires Smart Cooling Module Kit (P51171-B21), Smart Cooling Fan Kit (P51675-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Gold 6426Y 2.5GHz 16-core 185W Processor Kit for HPE Alletra 41X0	P50794-B21
Notes:	
– Requires High Performance Heat Sink Kit (P51169-B21), High Performance Fan Kit (P51673-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Gold 5420+ 2.0GHz 28-core 205W Processor Kit for HPE Alletra 41X0	P50804-B21
Notes:	
– Requires High Performance Heat Sink Kit (P51169-B21), High Performance Fan Kit (P51673-B21).	
– 128GB SGX Enclave.	



Configuration Information

Description	SKU
Intel Xeon-Gold 5418Y 2.0GHz 24-core 185W Processor Kit for HPE Alletra 41X0	P50803-B21
Notes:	
– Requires High Performance Heat Sink Kit (P51169-B21), High Performance Fan Kit (P51673-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Gold 5418N 1.8GHz 24-core 165W Processor Kit for HPE Alletra 41X0	P50816-B21
Notes:	
– Requires Standard Heat Sink Kit (P51833-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Gold 5416S 2.1GHz 16-core 150W Processor Kit for HPE Alletra 41X0	P50808-B21
Notes:	
– Requires High Performance Heat Sink Kit (P51169-B21), High Performance Fan Kit (P51673-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Gold 5415+ 2.9GHz 8-core 150W Processor Kit for HPE Alletra 41X0	P50793-B21
Notes:	
– Requires High Performance Heat Sink Kit (P51169-B21), High Performance Fan Kit (P51673-B21).	
– 128GB SGX Enclave.	
4th Generation Intel Xeon-Silver	
Notes:	
– All SKUs below ship with processor only. Adequate fans and heatsinks (Smart Cooling Module or high performance) must be selected.	
– 4000 MT/s maximum memory speed unless otherwise noted.	
Intel Xeon-Silver 4416+ 2.0GHz 20-core 165W Processor Kit for HPE Alletra 41X0	P50802-B21
Notes:	
– Requires High Performance Heat Sink Kit (P51169-B21), High Performance Fan Kit (P51673-B21).	
– 128GB SGX Enclave.	
Intel Xeon-Silver 4410Y 2.0GHz 12-core 150W Processor Kit for HPE Alletra 41X0	P50801-B21
Notes:	
– Requires High Performance Heat Sink Kit (P51169-B21), High Performance Fan Kit (P51673-B21).	
– 128GB SGX Enclave.	
Step 2b: Choose Memory Options	
Please select two or more memory DIMMs from below.	
For additional information, please see the HPE DDR5 Smart Memory QuickSpecs .	
Notes:	
– The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.	
– Quantity of memory DIMMs selected per socket must be 1, 2, 4, 6, 8, or 12.	
Registered DIMMs (RDIMMs)	
Notes: Mixing of 3DS and non-3DS DIMMs not allowed.	
HPE 16GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43322-K21
HPE 32GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43328-K21
HPE 64GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43331-K21
Notes: If this SKU and processors equal or greater than 270W are selected, the maximum drive quantity is 10.	



Configuration Information

Description

HPE 128GB (1x128GB) Quad Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit P43334-K21

Notes: This SKU cannot be selected if processors equal or greater than 270W or GPU are selected.

HPE 256GB (1x256GB) Octal Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit P43337-K21

Notes: This SKU cannot be selected if processors equal or greater than 270W or GPU are selected.

Step 2c: Choose Power Supplies

Please select one or two power supplies from below.

Notes: Mixing of 2 different power supplies is NOT supported.

HPE Flex Slot Power Supplies

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit P38995-B21

HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit P03178-B21

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit P38997-B21

HPE 1800W-2200W Flex Slot Titanium Hot Plug Power Supply Kit P44712-B21

Notes: Only supports high line voltage (200 VAC to 240 VAC).

HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit P17023-B21

Notes: Only supports high line voltage (200 VAC to 240 VAC).

Step 3: Choose Additional (FIO) Factory Integratable Options

Each of the following may be selected if desired at time of factory integration

Description

HPE Smart Memory Fast Fault Tolerance FIO Setting 875293-B21

Notes:

- Enables Fast Fault Tolerance mode, an HPE Memory RAS feature introduced in HPE Gen10 servers that survives up to two DRAM failures.
- This RAS feature combines Adaptive Double DRAM Device Correction (ADDC) with HPE Advanced Error Detection Technology, resulting in significantly better memory reliability and availability than what ADDC provides on its own. For more information see our [Memory RAS feature technical whitepaper](#).

HPE Security Options

HPE Server Security Optimized Service for HPE ProLiant (R9S59A) is an optional security upgrade intended for agencies and regulated industries with enhanced security and compliance needs. Applying this option to a HPE Alletra 41X0 CTO system ensures it is hardened by turning on advanced safeguards in place against cyber-exploits throughout the server lifecycle. An iLO Advanced License required for High Security Mode and compatible intrusion detection device option kits are prerequisites for the full optimization service.

Step 4: Management software

Select your choice of cloud-native management or on-premises management software.

HPE Greenlake for Compute Ops Management for cloud-native management

Notes: HPE Greenlake for Compute Ops Management for cloud-native management is available in two tiers: Standard, for managing systems individually, or Enhanced for management of multiple systems. Billing frequency is available as upfront, monthly, quarterly, or annual payments.

Recommended SKU

HPE GreenLake for Compute Ops Management Enhanced 5-year Upfront Alletra 4000 SaaS S1E13AAE



Configuration Information

Alternative SKUs

	SKU
HPE GreenLake for Compute Ops Management Enhanced 3-year Upfront Alletra 4000 SaaS	S1E12AAE
HPE GreenLake for Compute Ops Management Enhanced 3-year Monthly Alletra 4000 SaaS	S1E15AAE
HPE GreenLake for Compute Ops Management Enhanced 5-year Monthly Alletra 4000 SaaS	S1E16AAE
HPE GreenLake for Compute Ops Management Enhanced 3-year Quarterly Alletra 4000 SaaS	S1E18AAE
HPE GreenLake for Compute Ops Management Enhanced 5-year Quarterly Alletra 4000 SaaS	S1E19AAE
HPE GreenLake for Compute Ops Management Enhanced 3-year Annual Alletra 4000 SaaS	S1E20AAE
HPE GreenLake for Compute Ops Management Enhanced 5-year Annual Alletra 4000 SaaS	S1E21AAE
HPE GreenLake for Compute Ops Management Standard 3-year Upfront Alletra 4000 SaaS	S1E01AAE
HPE GreenLake for Compute Ops Management Standard 5-year Upfront Alletra 4000 SaaS	S1E02AAE
HPE GreenLake for Compute Ops Management Standard 3-year Monthly Alletra 4000 SaaS	S1E04AAE
HPE GreenLake for Compute Ops Management Standard 5-year Monthly Alletra 4000 SaaS	S1E05AAE
HPE GreenLake for Compute Ops Management Standard 3-year Quarterly Alletra 4000 SaaS	S1E07AAE
HPE GreenLake for Compute Ops Management Standard 5-year Quarterly Alletra 4000 SaaS	S1E08AAE
HPE GreenLake for Compute Ops Management Standard 3-year Annual Alletra 4000 SaaS	S1E09AAE
HPE GreenLake for Compute Ops Management Standard 5-year Annual Alletra 4000 SaaS	S1E10AAE

HPE OneView

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE



Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Unique Options

Cooling Options

Description	SKU
HPE Alletra 4110 High Performance Heat Sink Kit	P51169-B21
HPE Alletra 4110 Smart Cooling FIO Module Kit	P51171-B21
Notes: Required for processors with a TDP equal or greater than 270W.	
HPE Alletra 4110 High Performance Fan Kit	P51673-B21
HPE Alletra 4110 Smart Cooling Fan Kit	P51675-B21
Notes: Required for processors with a TDP equal or greater than 270W.	

Optical Drive Options

HPE Mobile USB DVD-RW Optical Drive	701498-B21
Notes: This kit is supported on USB 3.0 ports only.	

Security

HPE Gen11 1U Storage Bezel Kit	P52247-B21
HPE Bezel Lock Kit	875519-B21
Notes: Requires Bezel Kit (P52247-B21).	

HPE Memory

Please select two or more memory DIMMs from below.

For additional information, please see the [HPE DDR5 Smart Memory QuickSpecs](#).

Notes:

- The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.
- Quantity of memory DIMMs selected per socket must be 1, 2, 4, 6, 8, or 12.

HPE DDR5 Memory

Notes: DIMMs must be selected in quantities of 1, 2, 4, 6, 8, or 12 per socket.

Registered DIMMs (RDIMMs)

Notes: Mixing of 3DS and non-3DS DIMMs not allowed.

HPE 16GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43322-K21
HPE 32GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43328-K21
HPE 64GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43331-K21
Notes: If this SKU and processors equal or greater than 270W are selected, the maximum drive quantity is 10.	
HPE 128GB (1x128GB) Quad Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P43334-K21
Notes: This SKU cannot be selected if processors equal or greater than 270W or GPU are selected.	
HPE 256GB (1x256GB) Octal Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P43337-K21
Notes: This SKU cannot be selected if processors equal or greater than 270W or GPU are selected.	



Additional Options

HPE Boot Device

Description	SKU
HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device	P48183-B21
Notes: Supported when processors equal or less than 270W.	
HPE Alletra 41X0 Direct Attach NVMe M.2 OS Boot Device	P60350-B21
Notes:	
– No NVMe M.2 SSD included and requires at least one NVMe SSD.	
– Supported when processors equal or less than 270W.	
HPE 480GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	P40513-B21
HPE 960GB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	P40514-B21
HPE 1.92TB NVMe Gen3 Mainstream Performance Read Intensive M.2 Multi Vendor SSD	P40515-B21
HPE Alletra 4110 NVMe M.2 Enablement Kit	P51206-B21

Notes: Required when NVMe Boot Device is selected.

HPE Solid State Drives

For SSD selection guidance, please visit <https://ssd.hpe.com/>

Read Intensive – PCIe/NVMe EDSFF - E3S EC1 EDSFF Solid State Drives

HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	P56585-K21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	P56586-K21
HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	P56587-K21
HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF PM1743 SSD	P57799-K21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF PM1743 SSD	P57803-K21
HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF PM1743 SSD	P57807-K21

Read Intensive – PCIe/NVMe U.3 – SFF Basic Carrier Solid State Drives

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50216-K21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50219-K21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50222-K21
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50224-K21
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41402-K21

Notes:

- For direct attach:
 - o Requires TPM 2.0 for Local Key encryption.
- iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41403-K21
--	------------

Notes:

- For direct attach:
 - o Requires TPM 2.0 for Local Key encryption.
- iLO Advanced required for SED connectivity into customer's Remote Key Management environment.



Additional Options

Mixed Use – PCIe/NVMe U.3 – SFF Basic Carrier Solid State Drives

Description

	SKU
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50227-K21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50230-K21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50233-K21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41404-K21

Notes:

- For direct attach:
 - o Requires TPM 2.0 for Local Key encryption.
- iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41405-K21
--	------------

Notes:

- For direct attach:
 - o Requires TPM 2.0 for Local Key encryption.
- iLO Advanced required for SED connectivity into customer's Remote Key Management environment.

Read Intensive – PCIe/NVMe U.2 – SFF Basic Carrier Solid State Drives

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	P51453-K21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	P51455-K21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.2 P5520 SSD	P51457-K21

Mixed Use – PCIe/NVMe U.2 – SFF Basic Carrier Solid State Drives

HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	P51459-K21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	P51461-K21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.2 P5620 SSD	P51463-K21

HPE Smart IO

HPE Networking

1 Gigabit Ethernet adapters

Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T Adapter for HPE	P51178-B21
Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE	P21106-B21

10 Gigabit Ethernet adapters

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE	P26253-B21
Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE	P26259-B21

25 Gigabit Ethernet adapters

Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE	P26264-B21
Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P26262-B21
Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P08443-B21
Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P42044-B21
Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE	P08458-B21

Notes:

- Cannot be selected when processors equal or greater than 270W or 3DS Smart Memory Kit are selected.
- Support limited to 25°C maximum inlet temperature.



Additional Options

100 Gigabit Ethernet adapters

Description

	SKU
HPE Ethernet 100Gb 1-port QSFP28 PCIe3 x16 MCX515A-CCAT Adapter	P31246-B21
Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE	P21112-B21

Notes:

- Cannot be selected when processors equal or greater than 270W or 3DS Smart Memory Kit are selected.
- Support limited to 25°C maximum inlet temperature.

Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE	P25960-B21
--	------------

Notes:

- Cannot be selected when processors equal or greater than 270W or 3DS Smart Memory Kit are selected.
- Support limited to 25°C maximum inlet temperature.

200 Gigabit Ethernet adapters

Mellanox MCX623105AS-VDAT Ethernet 200Gb 1-port QSFP56 Adapter for HPE	P10180-B21
--	------------

Notes:

- Cannot be selected when processors equal or greater than 270W or 3DS Smart Memory Kit are selected.
- Support limited to 25°C maximum inlet temperature.

OCP Adapters

Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P51181-B21
--	------------

Notes: Cannot be selected when processors equal or greater than 270W are selected.

Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P08449-B21
---	------------

Notes: Cannot be selected when processors equal or greater than 270W are selected.

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE	P10097-B21
--	------------

Notes: Cannot be selected when processors equal or greater than 270W are selected.

Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE	P26256-B21
--	------------

Notes:

- Must add x16 OCP enablement kit (P36661-B21) if NIC x16 connectivity desired.
- Requires the High Performance Fan Kit (P26477-B21).

Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10115-B21
--	------------

Notes: Cannot be selected when processors equal or greater than 270W are selected.

Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE	P22767-B21
--	------------

Notes:

- Cannot be selected when processors greater than 205W are selected.
- Support limited to maximum 64GB capacity per DIMM
- Support limited to 10 drives per system

HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe4 x16 OCP3 MCX653435A-HDAI Adapter	P31323-B21
--	------------

Notes: Cannot be selected when processors equal or greater than 270W are selected.

HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 OCP3 MCX653436A-HDAI Adapter	P31348-B21
--	------------

Notes: Cannot be selected when processors equal or greater than 270W are selected.

HPE OCP Thermal Enhancement Kit	P28727-B21
---------------------------------	------------



Additional Options

HPE InfiniBand

Notes: Cannot be selected when processors equal or greater than 270W are selected.

Description	SKU
HPE InfiniBand HDR100/Ethernet 100Gb 1-port QSFP56 PCIe4 x16 MCX653105A-ECAT Adapter	P23665-B21
HPE InfiniBand HDR100/Ethernet 100Gb 2-port QSFP56 PCIe4 x16 MCX653106A-ECAT Adapter	P23666-B21
HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 MCX653106A-HDAT Adapter	P31324-B21
HPE InfiniBand NDR 1-port OSFP PCIe5 x16 MCX75310AAS-NEAT Adapter	P45641-B21
HPE InfiniBand NDR200 1-port OSFP PCIe5 x16 MCX75310AAS-HEAT Adapter	P45642-B21

HPE Power Supplies

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Plus Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

HPE Flex Slot Hot-plug Power supplies

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38995-B21
HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	P03178-B21
HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38997-B21
HPE 1800W-2200W Flex Slot Titanium Hot Plug Power Supply Kit	P44712-B21
Notes: Only supports high line voltage (200 VAC to 240 VAC).	
HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit	P17023-B21
Notes: Only supports high line voltage (200 VAC to 240 VAC).	

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

HPE Greenlake for Compute Ops Management

Notes: HPE Greenlake for Compute Ops Management for cloud-native management is available in two tiers: Standard, for managing systems individually, or Enhanced for management of multiple systems. Billing frequency is available as upfront, monthly, quarterly, or annual payments.

HPE GreenLake for Compute Ops Management Enhanced 3-year Upfront Alletra 4000 SaaS	S1E12AAE
HPE GreenLake for Compute Ops Management Enhanced 5-year Upfront Alletra 4000 SaaS	S1E13AAE
HPE GreenLake for Compute Ops Management Enhanced 3-year Monthly Alletra 4000 SaaS	S1E15AAE
HPE GreenLake for Compute Ops Management Enhanced 5-year Monthly Alletra 4000 SaaS	S1E16AAE
HPE GreenLake for Compute Ops Management Enhanced 3-year Quarterly Alletra 4000 SaaS	S1E18AAE
HPE GreenLake for Compute Ops Management Enhanced 5-year Quarterly Alletra 4000 SaaS	S1E19AAE
HPE GreenLake for Compute Ops Management Enhanced 3-year Annual Alletra 4000 SaaS	S1E20AAE
HPE GreenLake for Compute Ops Management Enhanced 5-year Annual Alletra 4000 SaaS	S1E21AAE
HPE GreenLake for Compute Ops Management Standard 3-year Upfront Alletra 4000 SaaS	S1E01AAE

Additional Options

Description	SKU
HPE GreenLake for Compute Ops Management Standard 5-year Upfront Alletra 4000 SaaS	S1E02AAE
HPE GreenLake for Compute Ops Management Standard 3-year Monthly Alletra 4000 SaaS	S1E04AAE
HPE GreenLake for Compute Ops Management Standard 5-year Monthly Alletra 4000 SaaS	S1E05AAE
HPE GreenLake for Compute Ops Management Standard 3-year Quarterly Alletra 4000 SaaS	S1E07AAE
HPE GreenLake for Compute Ops Management Standard 5-year Quarterly Alletra 4000 SaaS	S1E08AAE
HPE GreenLake for Compute Ops Management Standard 3-year Annual Alletra 4000 SaaS	S1E09AAE
HPE GreenLake for Compute Ops Management Standard 5-year Annual Alletra 4000 SaaS	S1E10AAE

Embedded Management

HPE iLO Advanced

HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features	512486-B21
HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features	512487-B21
HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features	BD506A
HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD507A
HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE

HPE iLO Common Password Setting

HPE iLO Common Password FIO Setting	P08040-B21
-------------------------------------	------------

Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services.

HPE Converged Infrastructure Management Software

HPE OneView Advanced (with HPE iLO Advanced)

HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE

HPE OneView Advanced (without HPE iLO Advanced)

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE

Notes:

- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>
- Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.
- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>



Additional Options

HPE Security

Description

	SKU
HPE Gen11 1U Storage Bezel Kit	P52247-B21
HPE Bezel Lock Kit	875519-B21

HPE Storage Options

Emulex Fibre Channel HBAs

HPE SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter	Q0L13A
HPE SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter	Q0L14A
HPE SN1610E 32Gb 1-port Fibre Channel Host Bus Adapter	R2J62A
HPE SN1610E 32Gb 2-port Fibre Channel Host Bus Adapter	R2J63A
HPE SN1700E 64Gb 1-port Fibre Channel Host Bus Adapter	R7N77A
HPE SN1700E 64Gb 2-port Fibre Channel Host Bus Adapter	R7N78A

QLogic Fibre Channel HBAs

HPE SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter	P9D93A
HPE SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter	P9D94A
HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter	R2E08A
HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter	R2E09A
HPE SN1700Q 64Gb 1-port Fibre Channel Host Bus Adapter	R7N86A
HPE SN1700Q 64Gb 2-port Fibre Channel Host Bus Adapter	R7N87A

HPE Rack Options

Rail Kits

Notes:

- HPE rail kits contain telescoping rails which allow for in-rack serviceability.
- Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations.
- Please refer to your installation instructions for proper tools and number of people to use for any installation.

HPE Easy Install Rail 7 Kit	P52339-B21
-----------------------------	------------

Notes: Used with 20 SFF model.

HPE DL325 Gen10 Plus Cable Management Arm	P18546-B21
---	------------

Notes: Used with HPE Easy Install Rail 7 Kit (P52339-B21)

HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit	P52341-B21
--	------------

Notes: Used with 20 EDSFF model.

HPE ProLiant DL300 Gen10 Plus 1U Cable Management Arm for Rail Kit	P26489-B21
--	------------

Notes: Used with HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit (P52341-B21)



Additional Options

HPE Racks

- Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
- Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Power Distribution Units (PDUs)

- Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications. Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\)](#) web page.
- Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

HPE USB and SD Options

Notes: In vSphere 7.0, VMware made changes that impact the use of an SD Card/USB media as a standalone boot device and will be removing support for them after version 7.x.

SD Card/USB media can still be used as a standalone boot option through all 7.x releases via published [Customer Advisory Usage of SD Card/USB Devices As Standalone Boot Devices Has Changed Due to System Storage Changes For VMware ESXi 7.0 \(Or Later\)](#).

For any major release beyond VMware ESXi 7.x, VMware will require M.2 or another local persistent device as the standalone boot option.

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

Description

HPE 32GB microSD RAID 1 USB Boot Drive

SKU

P21868-B21

HPE Support Services

Installation & Start-up Services

Tech Care

Notes: For a full listing of support services available for this server, please visit <http://www.hpe.com/services>.



Technical Specifications

System Unit

Dimensions (Height x Width x Depth)

20 SFF Drives SKU

- 4.29 x 43.46 x 84.22 cm
- 1.69 x 17.11 x 33.16 in

20 EDSFF Drives SKU

- 4.29 x 43.46 x 73.27 cm
- 1.69 x 17.11 x 28.85 in

Weight (approximate)

20 SFF Drives SKU

- Minimum: 11.62 kg (25.62 lb)
- Maximum: 24.01 kg (52.93 lb)

20 EDSFF Drives SKU

- Minimum: 8.84 kg (19.49 lb)
- Maximum: 19.94 kg (43.96 lb)

Input Requirements (per power supply)

Rated Line Voltage

- For 1800-2200W (Titanium): 200-240 VAC
- For 1600W (Platinum): 200-240 VAC
- For 1000W (Titanium): 200-240 VAC
- For 800W (Platinum): 100-240 VAC
- For 1600W (-48VDC): -40 Vdc to -72 Vdc

System Inlet Temperature

- **Standard Operating Support**

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hpe.com/servers/ashrae>

- **Extended Ambient Operating Support**

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system require the High Performance Fan Kit (P26477-B21) and are listed at the URL: <http://www.hpe.com/servers/ashrae> System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- **Non-operating**

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).



Technical Specifications

Relative Humidity (non-condensing)

- **Operating**
8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.
- **Non-operating**
5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Altitude

- **Operating**
3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
- **Non-operating**
9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Emissions Classification (EMC)

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Test case	1	3	4	5	6
Idle					
LWAd	5.1 B	5.4 B	5.4 B	5.1 B	5.1 B
LpAm	35 dBA	38 dBA	39 dBA	36 dBA	35 dBA
Operating					
LWAd	5.9 B	5.6 B	6.2 B	5.1 B	5.6 B
LpAm	45 dBA	41 dBA	47 dBA	34 dBA	40 dBA

Notes: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs** in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the **Hewlett Packard Enterprise web site**. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.





Summary of Changes

Date	Version History	Action	Description of Change
07-Aug-2023	Version 6	Changed	Standard Features and Configuration Information sections were updated
10-Jul-2023	Version 5	Changed	Overview, Standard Features and Configuration Information sections were updated
03-Apr-2023	Version 4	Changed	Overview, Standard Features, Configuration Information, Additional Options and Technical Specifications sections were updated.
06-Mar-2023	Version 3	Changed	Configuration Information and Additional Options sections were updated. Add SKU - P44712-B21
06-Feb-2023	Version 2	Changed	Additional Options section was updated Add SKUs - R7N86A and R7N87A
10-Jan-2023	Version 1	New	New QuickSpecs.



Copyright

Make the right purchase decision.
Contact our presales specialists.



© Copyright 2023 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

a50004319enw - 16923 - Worldwide - V6 - 07-August-2023